


COJINES DE AIRE TIPO A...N

Modelo	Diametro	Altura (mm)	Conexión	Terminal de conexión (mm)	Distancia a entrada de aire (mm)	Peso (kg)	Consumo de aire (NL/min)	Capacidad (kg)
	L	H	D	E	I	G		
A 25N	250	25	1/4"	10	65	1,1	80-140	300
A 30N	300	25	1/4"	10	90	1,5	100-200	500
A 40N	400	25	1/4"	10	120	2,4	130-250	1.000
A 50N	500	25	1/2"	10	150	3,7	240-450	1.800
A 70N	700	25	1/2"	10	220	4,7	400-750	3.000
A 90N	900	25	3/4"	10	270	6,9	500-1000	6.000

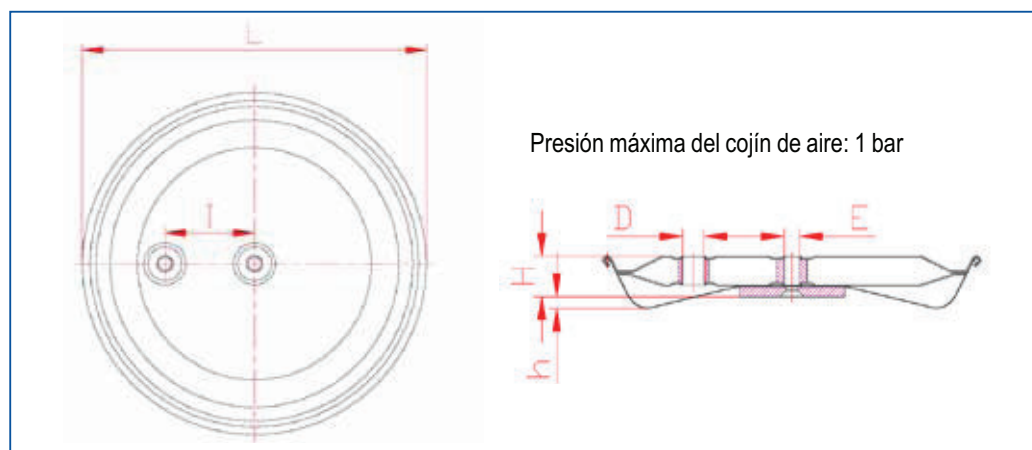

COJINES DE AIRE TIPO B...N

Modelo	Diametro	Altura (mm)	Elevación (mm)	Conexión	Terminal de conexión (mm)	Distancia a entrada de aire (mm)	Peso (kg)	Consumo de aire (NL/min)	Capacidad (kg)
	L	H	h	D	E	I	G		
B 30N	300	10	18-20	1 / 4 "	10	90	0,6	300-600	1.000
B 40N	400	12	20-25	1 / 4 "	10	120	1,0	400-700	2.000
B 50N	500	12	25-30	1 / 2 "	10	150	1,5	500-800	3.250
B 70N	700	14	30-40	1 / 2 "	10	220	3,0	600-1000	6.000
B 90N	900	22	40-50	3 / 4 "	10	270	6,0	800-1300	10.000

