




	Premium Modelo DF.0.DEH	Modelo SG.0.DTS
Modelos disponibles / Available models	0.25 - 2 ton / 400V	0.25 - 15 ton / 400V
Velocidad de elevación / Lifting speed	0.250 ton	8/2 m/min
	0.500 ton	8/2 m/min
	1.000 ton	8/2 m/min
	2.000 ton	4/1 m/min
Peso neto / Net weight	0.250 ton	22 kg
	0.500 ton	33 kg
	1.000 ton	53 kg
	2.000 ton	58 kg

Tamaño de la caja en comparación /  
Comparison of body dimensions

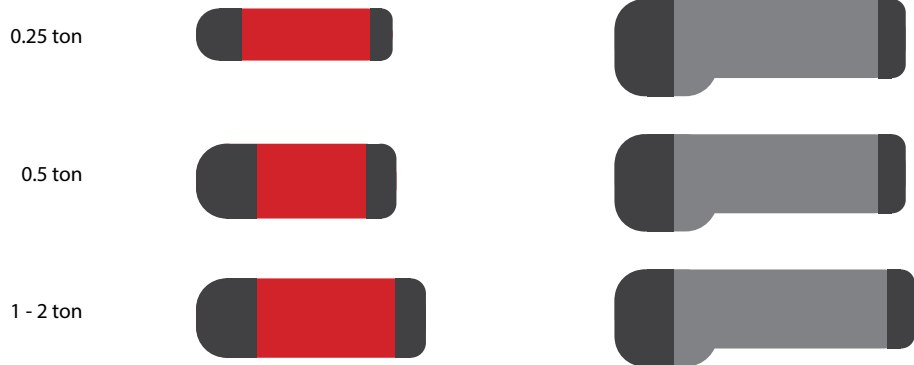

Protección del caso / Housing protection	IP 55
Clasificación / Classification	M5/2m (ISO/FEM)
Ciclo de trabajo / Duty cycle	40%
Control del voltaje / Control voltage	24 V
Protección de sobrecarga / Overload protection	Embrague deslizante + protección digital / Slip clutch + digital protection
Interruptor de límite / Limit switch	Microinterruptor superior e inferior / Upper and lower micro switch
Protección térmica / Thermal protection	Sensor de calor / Heat sensor
Cadena de carga / Load chain	
Sistema de control / Control system	SIEMENS