


TERMINAL CERRADO

**ACERO FUNDIDO
TEMPLADO**

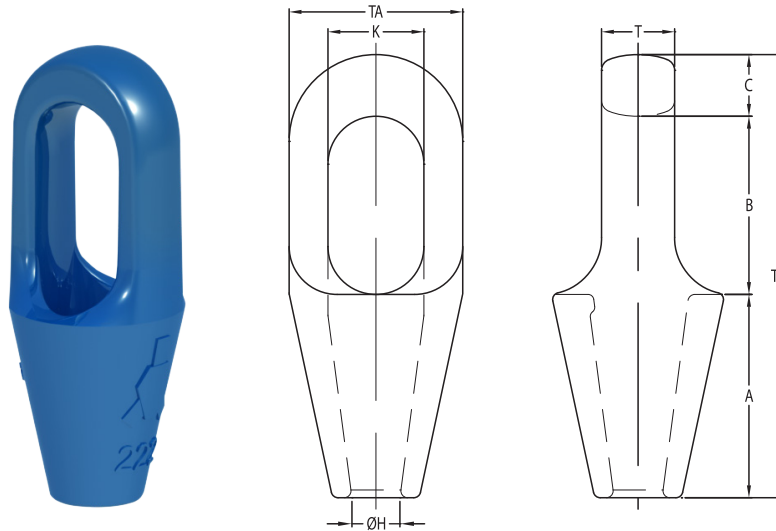

Model nr.	MBL (Mtons)	for wire ø		Strand ø		Dimensions (mm)								Weight (kg)
		(mm)	(inch)	(mm)	(inch)	A	B	C	øH	K	T	TA	TL	
CSS 296	8	6-7	1/4	-	-	50	40	11	9	22	13	37	101	0,3
CSS 297	12	8-10	3/8	-	-	57	48	14	13	25	18	43	119	0,4
CSS 298	20	11-13	7/16 - 1/2	-	-	64	59	17,5	15	30	23	51	140	0,7
CSS 299	25	14-16	9/16 - 5/8	13	1/2	76	65	21	18	36	26	67	162	1,4
CSS 200	40	18-19	3/4	14-16	9/16 - 5/8	89	78	27	22	42	32	76	194	2,2
CSS 201	55	20-22	7/8	18-19	3/4	101	90	33	25	47	38	92	224	3,8
CSS 204	75	23-26	1	20-22	7/8	114	103	36	29	57	44	104	253	5,4
CSS 207	90	27-30	1 1/8	23-26	1	127	116	39	33	65	51	114	282	7
CSS 212	125	31-36	1 1/4 - 1 3/8	27-28	1 1/16 - 1 1/8	139	130	43	39	71	57	126	312	10
CSS 215	150	37-39	1 1/2	30-32	1 3/16 - 1 1/4	152	155	51	42	81	63	136	358	13
CSS 217	170	40-42	1 5/8	33-35	1 5/16 - 1 3/8	165	171	54	45	83	70	146	390	17
CSS 219	225	43-48	1 3/4 - 1 7/8	36-40	1 7/16 - 1 5/8	190	198	55	52	93	76	171	443	26
CSS 222	280	49-54	2 - 2 1/8	42-45	1 5/8 - 1 3/4	216	224	62	59	100	82	193	502	37
CSS 224	360	55-60	2 1/4 - 2 3/8	46-48	1 13/16 - 1 7/8	228	247	73	64	112	92	216	548	50
CSS 226	425	61-68	2 1/2 - 2 5/8	50-54	2 - 2 1/8	248	270	79	75	140	102	241	597	66
CSS 227	460	69-75	2 3/4 - 2 7/8	56-62	2 1/4 - 2 1/2	279	286	79	81	159	124	273	644	91
CSS 228	560	76-80	3 - 3 1/8	64-67	2 1/2 - 2 5/8	315	298	83	88	171	133	292	696	117
CSS 229	625	81-86	3 1/4 - 3 3/8	69-76	2 3/4 - 3	330	311	102	92	184	146	311	743	125
CSS 230	720	87-93	3 1/2 - 3 5/8	78-86	3 1/16 - 3 3/8	356	330	102	99	197	159	330	788	176
CSS 231	875	94-102	3 3/4 - 4	88-96	3 7/16 - 3 3/4	381	356	108	108	216	178	362	845	228
CSS 233	1200	108-115	4 1/4 - 4 1/2	98-110	3 7/8 - 4 5/16	450	425	125	129	235	190	405	1000	323
CSS 240	1400	120-130	4 3/4 - 5	112-124	4 7/16 - 4 7/8	500	525	125	147	260	200	450	1150	447
CSS 245	1600	135-140	5 1/4 - 5 1/2	125-132	4 15/16 - 5 3/16	540	495	150	157	290	220	520	1185	645
CSS 250	2000	142-153	5 3/4 - 6	133-143	5 1/4 - 5 5/8	585	530	170	171	305	240	545	1285	741
CSS 255	2220	154-165	6 1/4 - 6 1/2	144-154	5 11/16 - 6 1/4	630	565	175	185	330	250	575	1370	860
CSS 260	2500	166-178	6 3/4 - 7	155-166	6 1/4 - 6 3/4	680	590	180	199	330	270	595	1450	985
CSS 265	2800	180-191	7 1/4 - 7 1/2	167-179	6 9/16 - 7 1/16	725	620	190	213	350	290	625	1535	1183
CSS 270	3200	192-204	7 3/4 - 8	180-191	7 1/4 - 7 1/2	775	650	210	229	395	305	690	1635	1487

MBL = Minimum Breaking Load

- The standard finish of our sockets is blue. Hot dipped galvanized is also available.
- Socket range OSS 196 until OSS 100 is delivered with galvanized finish, other finishes are available upon request.
- All sockets are provided with an EN 10204-2.1 declaration of conformity, EN 10204-3.1 material certificate and can be provided with a 2006/42/EC declaration where applicable.
- Dimensional tolerances depend on the manufacturing techniques applied and are different between machined components (pins) and cast components (socket bodies and wedges).
- Also surface finish e.g. hot dip galvanizing or even paint may add to the overall thickness and fork distance.
- Please contact Ropeblock for further guidance and a detailed dimensional tolerance sheet.